


Spectral Response

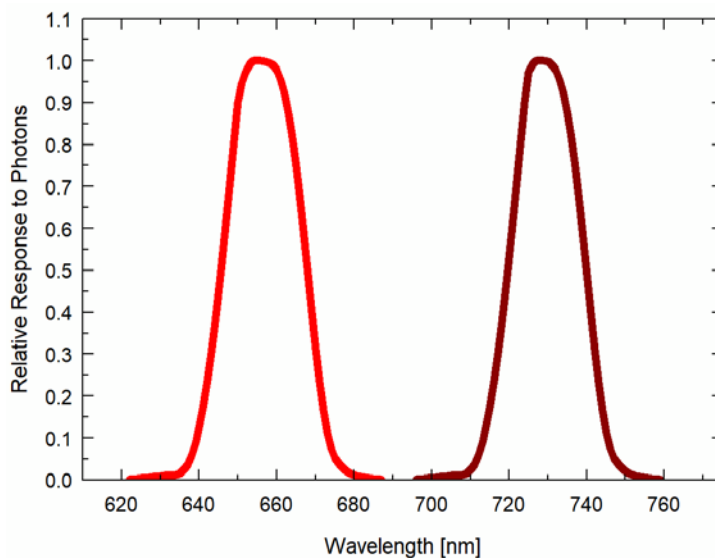

Spectral response of **Red detector** (red) and **Far-red detector** (maroon).


Product Specifications

	S2-131-SS	S2-431-SS	S2-432-SS
Power Supply	Self-powered	5.5 to 24 V DC	
Current Draw	—	1.4 mA (quiescent), 1.8 mA (active)	RS-232 quiescent 36.87 mA, active 37.06 mA; RS-485 quiescent 37.37 mA, active 42.30 mA
Output (sensitivity)	0.08 mV per $\mu\text{mol m}^{-2} \text{s}^{-1}$ (typical value, variable from sensor to sensor)	—	
Calibration Factor (reciprocal of sensitivity)	12 $\mu\text{mol m}^{-2} \text{s}^{-1}$ per mV (typical value, variable from sensor to sensor)	Custom for each sensor and stored in firmware	
Calibration Uncertainty	$\pm 5\%$		
Output Range	0 to 33 mV	SDI-12	Modbus
Measurement Repeatability	Less than 1 %		
Long-term Drift	Less than 2 % per year		
Non-linearity	Less than 1 % (up to 400 $\mu\text{mol m}^{-2} \text{s}^{-1}$)		
Response Time	Less than 1 ms	Less than 0.6 s	—
Field of View	180°		
Spectral Ranges (see graph)	645 to 665 nm ± 5 nm (Red) 720 to 740 nm ± 5 nm (Far-red)		
Directional (Cosine) Response	$\pm 2\%$ at 45°; $\pm 5\%$ at 75° zenith angle		
Temperature Response	Less than 0.1 % per C		
Housing	Anodized aluminum body with acrylic diffuser		
IP Rating	IP68		
Operating Environment	-40 to 70 C; 0 to 100 % relative humidity		
Dimensions	30.5 mm diameter, 37 mm height		
Mass (with 5 m of cable)	140 g		
Warranty	4 years against defects in materials and workmanship		

Overview

Apogee Red - Far-Red sensors combine two photodetectors designed to measure wavelength ranges and peaks that approximate phytochrome absorption. The red / far-red ratio can be calculated from these measurements. Red and far-red wavelengths are of particular interest because they influence photosynthetic and morphogenic activity. Phytochrome pigments sensitive to varying ratios of red and far-red light provide information to the plant about its light environment.

Dimensions

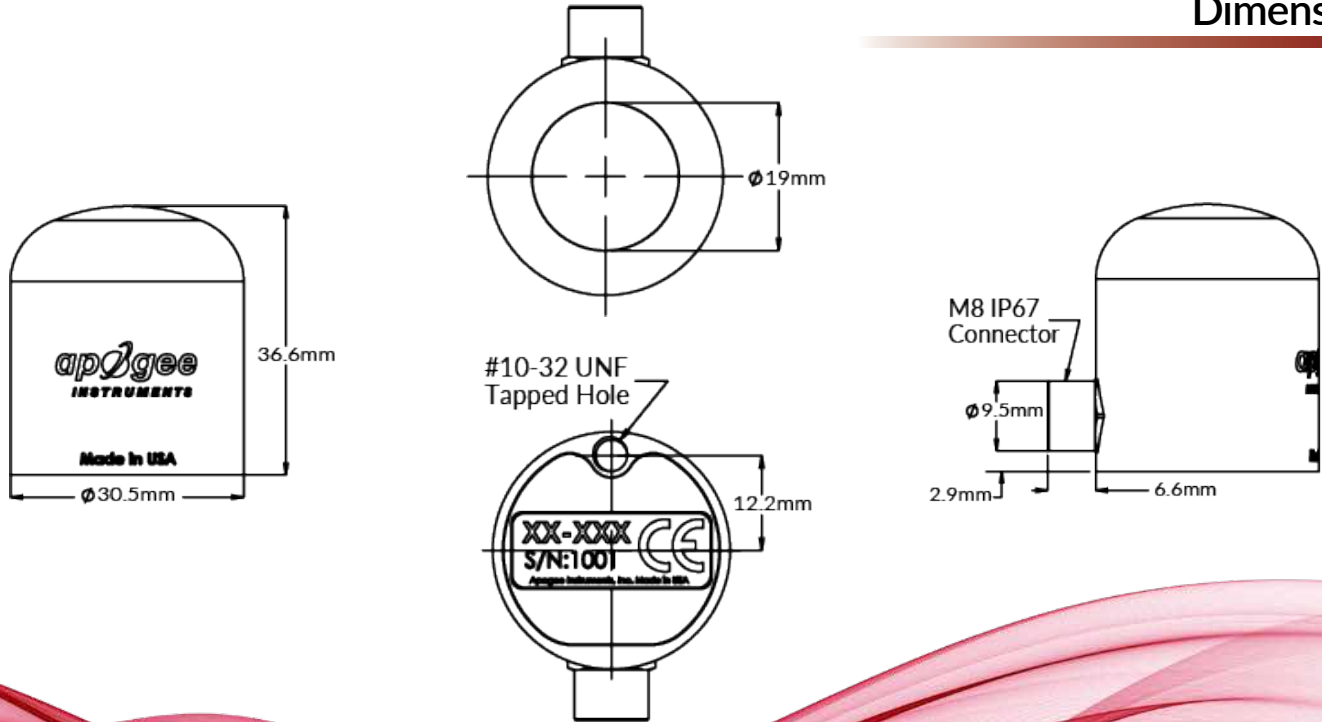

Features

TYPICAL APPLICATIONS

- Monitoring plant light environments
- Research plant morphogenic activity
- Photobiology studies

KEY FEATURES

Digital SDI-12 output is standard with analog and Modbus options available. A domed diffuser promotes self-cleaning to minimize errors from dust and debris.

HIGH QUALITY CABLE

Pigtail-lead sensors feature on IP68, marine-grade stainless-steel cable connectors attached directly to the sensor head to simplify sensor removal for maintenance and recalibration.

